

## Features

### Firmware revision 3.0

- One PCB board with 5 read out channels for XEN-TCG3880 sensors on a 50 cm Ruler (XEN-3700).
- Each read out channel in combination with a sensor on the Ruler functions as a XEN-5320.
- For the XEN-TCG3880 sensors see datasheet for XEN-TCG3880.  
For the Rulers see datasheet for XEN-3700.  
For XEN-5320 see datasheet for the XEN-5320.

## Applications


- Hydrogen and helium gas concentration measurement in chambers, for combination of 2x XEN-5350 and 1x XEN-3700.

### The XEN-5350 + XEN-3700 combination is designed for R&D applications


The combi is not conform the standards for hydrogen detection sensors.

The combi is not designed to be a reliable safety device.

The combi is intended for test experiments only, under expert supervision, in safe experimental environments.

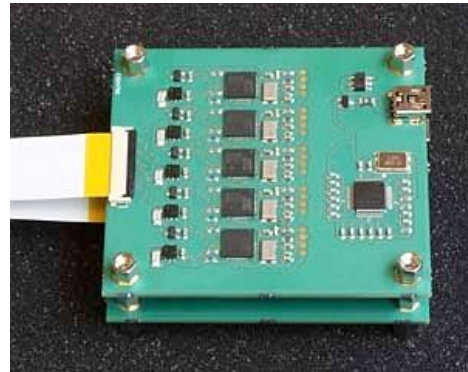

**XEN-5350** (2x stacked):  
USB 5 channel read out for Ruler XEN-3700  
(70 × 65 × 7 mm<sup>3</sup>)

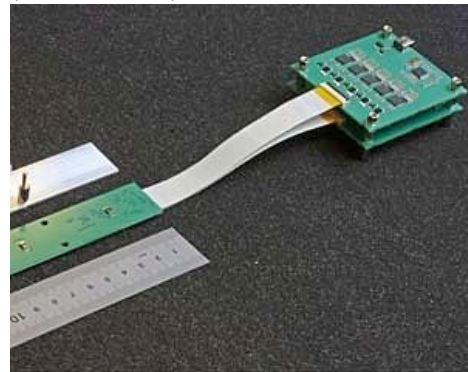

2x XEN-5350 connected with Ruler XEN-3700 (50 cm)

Conditions: Use of sensors for industrial applications is subjected to patent rights. Xensor Integration assumes no liability arising from violation of these rights

Warranty: Xensor Integration warrants its products against defects in materials and workmanship for 12 months from date of shipment. Products not subject to misuse will be replaced or repaired. The foregoing is in lieu of all other expressed or implied warranties. Xensor Integration reserves the right to make changes to any product herein and assumes no liability arising out of the application or use of any product or circuit described or referenced herein.

## Xensor Integration bv

Distributieweg 28  
2645 EJ Delfgauw  
The Netherlands

Phone +31 (0)15-2578040  
Fax +31 (0)15-2578050  
Email [info@xensor.nl](mailto:info@xensor.nl)

Founded 18 May 1988  
Trade reg. 27227437  
Site [www.xensor.nl](http://www.xensor.nl)

Smart Sensor Devices

ABN-AMRO 60 50 40 311  
IBAN NL42ABNA060504031  
1  
VAT NL 009122746 B01